

Sightglass for Flanges

Liquip's acrylic sightglass are for mounting between two flanges and allow visual indication of contents in pipework.

Key Features

- Cast Acrylic design that provides superior optical clarity.
- Annealed for improved performance with aggressive fuel additives.
- Sightglass fits between two flanges of the same specification.
- TTMA or ANSI flange options available.
- Full face Viton gaskets available and recommended.
- Sightglasses are date stamped to assist with planned maintenance.
- Suitable for all common fuel grades including diesel, unleaded, jet and ethanol blends.



Ordering Information

API-SG-150	Sightglass	ASA150	40mm	125ID
VI 1-20-T20	JIETILEIUSS	MOMINU.		エムンコレ

BF4-SG-40 Sightglass 100MM TTMA 40mm thick Acrylic Flange

BF4-SG-25 Sightglass 100MM TTMA 25mm thick Acrylic Flange comes with 8 x Holes

BF3-SG Sightglass Flange 3" TTMA to suit LBV3-V Butterfly Valve

Specifications

Weight	1.2kg - API-SG-150 0.69kg - BF4-SG-40 0.44kg - BF4-SG-25 0.3kg - BF3-SG
--------	--

Do not use with solvents – see compatibility list following

Maximum working pressure – 1,000kPa Working temperature -50°C to +80°C

Technical Data Mounting bolts of adequate length tightened to a torque of 20Nm -


Tighten up evenly in a criss-cross manner. Install with full face gaskets on both sides.


Do not flame polish.

4" ANSI 125 flanges (must have flat face)
4" TTMA flanges BF4 and BF4-1
3" TTMA flanges BF3 and BF3-1
0657V Viton A gasket for 4" TTMA
0656V Viton A gasket for 3" TTMA
0657 Cork Gasket for 4" TTMA
0656 Cork Gasket for 3" TTMA

www.liquip.com

SIGHTGLASS FOR FLANGES

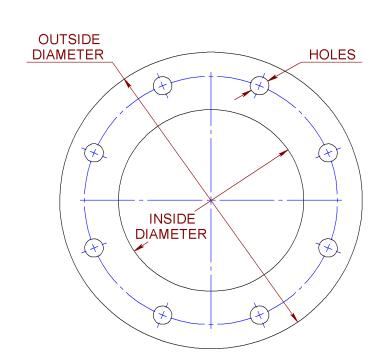



Size	Part No	Outside Diameter	Inside Diameter	Thickness	Holes
4" ANSI125	API-SG-150	228	130	40	8 x Ø19 on 190 PCD
4" TTMA	BF4-SG-25	178	109	25	8 x Ø11 on 149.2 PCD
4" TTMA	BF4-SG-40	178	109	40	8 x Ø11 on 149.2 PCD
3" TTMA	BF3-SG	146	86	25	8 x Ø11 on 124 PCD

NOTES:

- 1. MATERIAL IS CAST ACRYLIC.
- 2. MOUNTING FLANGES TO BE FLAT TO WITHIN 1mm.
- 3. VITON (OR SIMILAR HARDNESS) GASKETS TO BE USED.
 4. TIGHTEN MOUNTING BOLTS TO A TORQUE OF 20Nm.

METERS - VALVES - VENTS - MANHOLES - HOSEREELS - OVERFILL PROTECTION - LOADING ARMS - ELECTRONIC DIPSTICKS



LIQUIP INTERNATIONAL PTY LTD

. 148B NEWTON RD, WETHERILL PARK, SYDNEY N.S.W. AUSTRALIA 2164 Phone: +61 2 9725-9000 Web:www.liquip.com

X200705

Sheet 1 of 1 Issue: E

Non Compatible – Not Recommended

Acetic Acid 50% Acetic Acid, Glacial Acetic Anhydride

Acetone Acetonitrile Acrylonitrile Allyl Alcohol n-Amyl Acetate Aniline

Aniline
Aqua regia
Benzaldehyde
Benzene
Benzyl Acetate
Benzyl Alcohol
Bromine
Bromobenzene
Bromoform
n-Butyl Acetate
n-Butyl Alcohol

Calcium Hypochlorite, saturated

Cellosolve Acetate

i-Butyl Alcohol

t-Butyl Alcohol

Carbazole
Carbon Disulfide
Carbon Tetrachloride
Cedarwood Oil
Chloroacetic Acid
p-Chloracetophenone

Chlorobenzene
Chloroform
Chromic Acid 50%
Cinnamon Oil
Cresol
Cyclohexane
Cyclohexanone

Decalin n-decane

o-Dichlorobenzene p-Dichlorobenzene Diethyl Ether Diethyl Ketone Malonate

Dimethyl Formamide

Sulfoxide
1, 4-dioxane
Diacetone alcohol
1, 2-dichloroethane
2, 4-dichlorophenol

Dioxane

Dibutyl phthalate Dioctyl phthalate

Ether

Ethyl Acetate
Ethyl Benzene
Ethyl Benzoate
Ethyl Butyrate
Ethyl Chloride liquid

Ethyl Cyanoacetate Ethyl Lactate Ethylene Chloride

Fluorides Fluorine

Formic Acid, 98%-100% Acetic Acid, Glacial Hydrochloric Acid, 48% Hydrogen Peroxide, 90%

Hvdrazine **Iodine Crystals** Isobutyl Alcohol Isopropyl Benzene Isopropyl Ether Lacquer Thinner Methyl Alcohol Methyl Ethyl Ketone Methyl Isobutyl Ketone Methyl Propyl Ketone Methylene Chloride 2-Methoxyethanol Methyl Acetate Mineral Spirits Nitric Acid 70% Nitrobenzene Nitromethane Perchloric Acid Perchloroethylene Phenol, Crystals Phenol, Liquid

Phosphoric Acid, 85%
Piric Acid
Propionic Acid
Propylene Oxide
Resorcinol, saturated
Salicylic Acid, Powder
Salicylic Acid, saturated

Sulfur Dioxide, Wet or Dry Sulfuric Acid, 98% Tetrahydrofuran Thionyl Chloride

Toluene

Tributyl Citrate
Trichloroethane
Trichloroethylene
Trichloroacetic Acid
1,2,4 Trichlorobenzene

Turpentine Undecyl Alcohol Vinylidene Chloride

Xylene

